
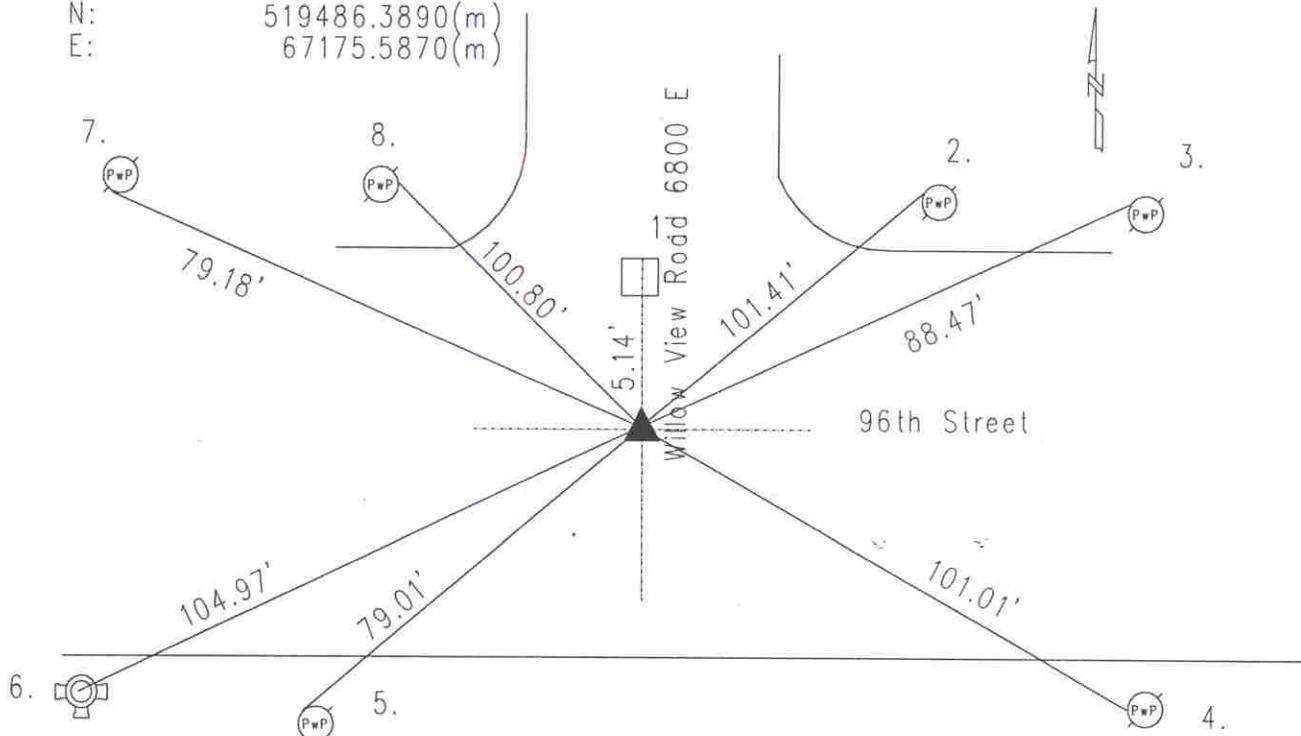


OFFICE OF THE MARION COUNTY SURVEYOR
 SECTION RECORD CORNER
 SECTION 14 TOWNSHIP 17 RANGE 4
 DATE: 8-11-01
 PARTY CHIEF: Whiteside
 CREW: _____
 TYPE OF MARKER: Harrison
 METHOD OF ESTABLISHMENT: County: 7-17-96

IN. S.P.C. E ZONE NAD '83
 NAME: 17041401
 N: 519486.3890(m)
 E: 67175.5870(m)

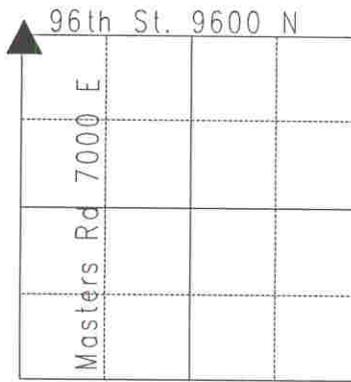

Original post set 1821 by Laughlin with witnesses: 10" beech N 10 W 24 links; 14" beech S 25 W 11 links per Marion County Atlas pg. 12. Smith 9-4-1866 called stone with witness; 10" stone N 20 W 26 1/2 links per Lawrence Township Legal Survey Book pg. 59. Reference, no date, called same. 5-31-71 called PK nail over stone. 4-21-76 called 3/4" iron pipe. 7-9-80 called large road nail in 3/4" iron pipe. Excavated 8-12-86 w/DOT backhoe, after a previous inspection revealed stone to be too large to remove by hand, stone found 12" down. Weight 500 lbs +/- . Harrison set in position of stone. Re-tied 7-17-96 by Kiste. Re-tied 8-11-01 by Whiteside.
 17041401

REF.	DISTANCE	DESCRIPTION
1.	5.14'	Due N to brass plug in steel box
2.	101.41'	PKnail NW PSI PwP#252-542 24"up
3.	88.47'	Mag nail w/brass washer NW PwP no# 10"up
4.	101.01'	Mag nail w/brass washer N PwP#20-177 B 10"up
5.	79.01'	Mag nail w/washer NW PwP#19-177 B 6"up
6.	104.97'	Top nut of fire hydrant
7.	79.18'	Mag nail SW PwP#089-186 14"up
8.	100.80'	Mag nail w/brass washer E PwP no# 42"up